



## Linear.240

Product Category: *Linear*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

w: [www.lightingoflondon.co](http://www.lightingoflondon.co)



Our linear range, consisting of an aluminium profile and LED strip light, is expertly designed to provide a long-lasting and high-quality lighting solution. The output and color rendering remain consistent over time, and the highlighting effect does not decay.

You can choose from 2700K or 4000K color temperature options, and 5m or 10m lengths.

Additionally, we offer two IP ratings: IP20 or IP66.

We can customise our linear range to meet your specific needs and bring your vision to life.

<b>Input Voltage</b>	<i>DC 24V Constant Voltage</i>	<b>PCB Width</b>	<i>8mm</i>
<b>Power Per Metre</b>	<i>9.6W</i>	<b>Beam Angle</b>	<i>120°</i>
<b>Lumen Watts</b>	<i>81Lm</i>	<b>IP Rating</b>	<i>20 / 66</i>
<b>Lumen Per Metre</b>	<i>2700K - 850Lm / 4000K - 950Lm</i>	<b>Colour Temperature</b>	<i>2700K / 4000K</i>
<b>CRI</b>	<i>&gt;90</i>	<b>Version</b>	<i>240 LEDS per metre</i>
<b>Cut Length</b>	<i>25mm</i>	<b>Length</b>	<i>5m / 10m</i>



## Linear.350

Product Category: *Linear*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)



Our linear range, consisting of an aluminium profile and LED strip light, is expertly designed to provide a long-lasting and high-quality lighting solution. The output and color rendering remain consistent over time, and the highlighting effect does not decay.

You can choose from 2700K or 4000K color temperature options, and 5m or 10m lengths.

Additionally, we offer two IP ratings: IP20 or IP66.

We can customise our linear range to meet your specific needs and bring your vision to life.

<b>Input Voltage</b>	<i>DC 24V Constant Voltage</i>	<b>PCB Width</b>	<i>8mm</i>
<b>Power Per Metre</b>	<i>13W</i>	<b>Beam Angle</b>	<i>120°</i>
<b>Lumen Watts</b>	<i>102Lm</i>	<b>IP Rating</b>	<i>20 / 66</i>
<b>Lumen Per Metre</b>	<i>2700K - 1150Lm / 4000K - 1300Lm</i>	<b>Colour Temperature</b>	<i>2700K / 4000K</i>
<b>CRI</b>	<i>&gt;90</i>	<b>Version</b>	<i>350 LEDS per metre</i>
<b>Cut Length</b>	<i>20mm</i>	<b>Length</b>	<i>5m / 10m</i>



## Profiles.

Product Category: *Linear*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

w: [www.lightingoflondon.co](http://www.lightingoflondon.co)



Manufactured to the highest standards, all our aluminium profiles are supplied with end caps and fixing clips, perfect for heat dissipation, with an opal diffuser to eliminate LED spotting.

If installing an LED strip into a profile and the placement of the profile will be directly visible, please refer to the guide below:


Product Category: *Linear*

	Linear.240	Linear.350	Linear.RGBW
<b>Cove</b>	No Spotting	No Spotting	Spotting Visible
<b>Flush</b>	Spotting Visible	No Spotting	Spotting Visible
<b>Line</b>	No Spotting	No Spotting	Spotting Visible
<b>Lean</b>	No Spotting	No Spotting	Spotting Visible
<b>Plaster</b>	No Spotting	No Spotting	Spotting Visible
<b>Wash</b>	No Spotting	No Spotting	Spotting Visible

### Cove




### Lean

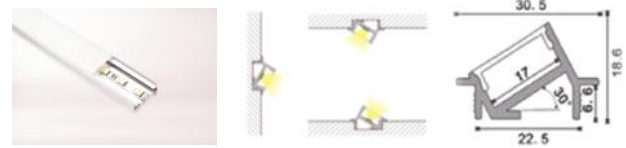


### Flush




### Plaster

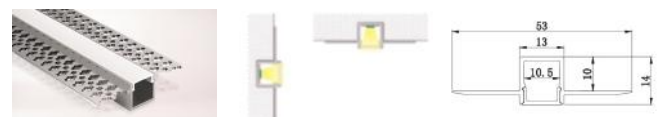

### Line

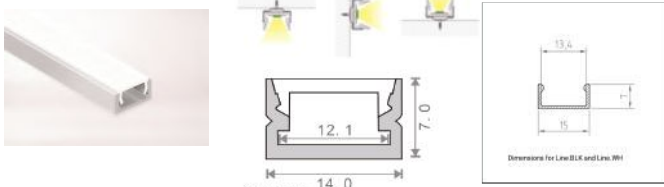

### Wash

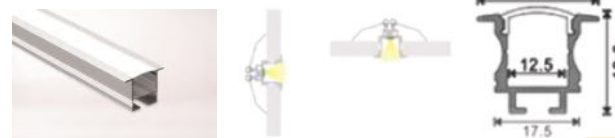




## Linear.RGBW

Product Category: *Linear*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

w: [www.lightingoflondon.co](http://www.lightingoflondon.co)

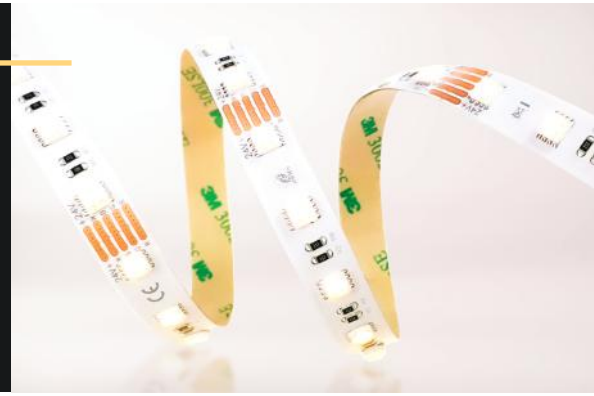

Our linear range, consisting of an aluminium profile and LED strip light, is expertly designed to provide a long-lasting and high-quality lighting solution. The output and color rendering remain consistent over time, and the highlighting effect does not decay.

You can choose from 2700K or 4000K color temperature options, and 5m or 10m lengths. Additionally, we offer two IP ratings: IP20 or IP66.

We can customise our linear range to meet your specific needs and bring your vision to life.

<b>Input Voltage</b>	<i>DC 24V Constant Voltage</i>	<b>PCB Width</b>	<i>10mm</i>
<b>Power Per Metre</b>	<i>19.2W / 4.8W per channel</i>	<b>Beam Angle</b>	<i>120°</i>
<b>Lumen Watts</b>	<i>57Lm</i>	<b>IP Rating</b>	<i>20 / 66</i>
<b>Lumen Per Metre</b>	<i>1100Lm (4 chips)</i>	<b>Colour Temperature</b>	<i>2700K / 4000K</i>
<b>CRI</b>	<i>&gt;90</i>	<b>Version</b>	<i>60 LEDs per metre</i>
<b>Cut Length</b>	<i>100mm</i>	<b>Length</b>	<i>5m / 10m</i>