



## Pin.

**Product Category:** *Low-level / Exterior*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Pin is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Pin light offers 30° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.


The Pin light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>30°</i>
<b>Lumen Output</b>	<i>160Lm</i>	<b>Luminous Efficacy</b>	<i>76lm / W</i>
<b>Power</b>	<i>2.1W 3V 700mA</i>	<b>IP Rating</b>	<i>65</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Driver Required</b>	<i>Yes</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>DALI Control</b>	<i>Yes (third party driver required)</i>
<b>Size</b>	<i>70mm x 70mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>
<b>Cut Out</b>	<i>Ø 62mm</i>		

### Light Distribution Curve



### Dimensions

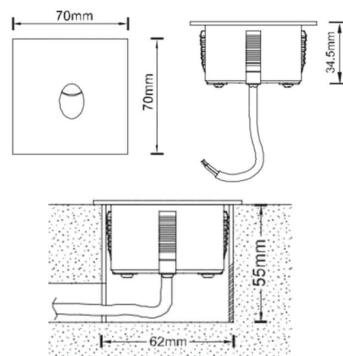

### Lux Distribution Curve

Height	Center E	Beam Angle: 32.8	Average E	Diameter
3.281ft	0.176fc		4.998fc	1.033ft
1.0m	5.127lx		53.802lx	0.589m
6.562ft	0.119fc		1.250fc	3.885ft
2.0m	1.282lx		13.451lx	1.178m
9.843ft	0.053fc		0.556fc	5.799ft
3.0m	0.570lx		5.978lx	1.707m
13.123ft	0.030fc		0.312fc	7.731ft
1.0m	0.320lx		3.363lx	2.306m
16.404ft	0.019fc		0.200fc	9.663ft
5.0m	0.205lx		2.157lx	2.915m