



## Spot.S

Product Category: Exterior / Spotlights

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

w: [www.lightingoflondon.co](http://www.lightingoflondon.co)





The Spot.S is a compact but powerful lighting solution that can be used both indoors and outdoors. The Spot.S provides a beautiful output to illuminate any surface or target. With its unique color finish, it can blend in seamlessly with any environment. For outdoor settings, a ground spike is included for easy positioning, and the resin-filled cable entry and gland provide the ultimate protection against water damage. For smooth dimming, our range of PowerBank drivers can be used with the Spot.S.

<b>Material</b>	Anodised Aluminium	<b>Beam Angle</b>	15° / 30° / 45°
<b>Lumen Output</b>	160Lm	<b>Luminous Efficacy</b>	85lm / W
<b>Power</b>	2.1W 3V 700mA	<b>IP Rating</b>	67
<b>Dimmable</b>	Yes	<b>Driver Required</b>	Yes
<b>CRI</b>	>95	<b>Binning</b>	2 - 3 SDCM
<b>Power Factor</b>	>0.98	<b>DALI Control</b>	Yes (third party driver required)
<b>Size</b>	ø28mm x 39mm	<b>Colour Temperature</b>	2700K
<b>Cut Out</b>	N/A		

### Light Distribution Curve

### Dimensions

### Lux Distribution Curve

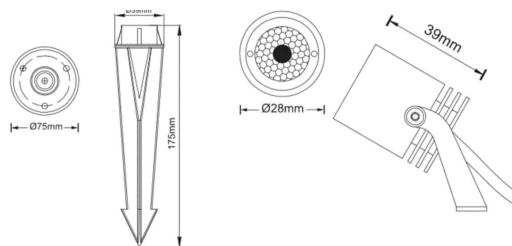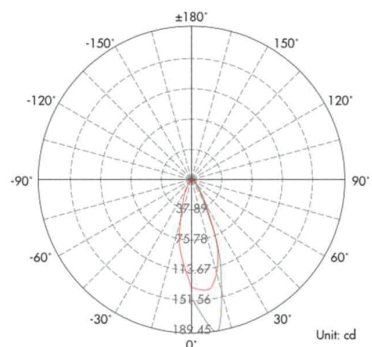

Distance (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width (V x H)
2m	33.42 LUX	1.1m x 1.0m
4m	8.35 LUX	2.2m x 2.0m
6m	3.71 LUX	3.3m x 3.0m
8m	2.09 LUX	4.3m x 4.0m
10m	1.34 LUX	5.4m x 5.1m
12m	0.93 LUX	6.5m x 6.1m

Vert.Spread:30.4      Horiz.Spread:28.4