



## Spot.Z

Product Category: Exterior / Spotlights

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Spot.Z provides the ability to pinpoint any surface or target to create the most dramatic designs. The fully zoomable lens provides a beam from 10° to 40°, and with our unique colour finish it's virtually invisible in any environment.


This device can be used both indoors and outdoors, and it comes with a ground spike for external positioning. Additionally, it has a resin-filled cable entry and gland that provides ultimate protection against water ingress. To ensure that it can be smoothly dimmed, our range of PowerBank drivers is available.

<b>Material</b>	Anodised Aluminium	<b>Beam Angle</b>	10 - 40°
<b>Lumen Output</b>	500Lm	<b>Luminous Efficacy</b>	79lm / W
<b>Power</b>	6.3W 9V 700mA	<b>IP Rating</b>	67
<b>Dimmable</b>	Yes	<b>Driver Required</b>	Yes
<b>CRI</b>	>95	<b>Binning</b>	2 - 3 SDCM
<b>Power Factor</b>	>0.98	<b>DALI Control</b>	Yes (third party driver required)
<b>Size</b>	ø52mm x 103mm	<b>Colour Temperature</b>	2700K
<b>Cut Out</b>	N/A		

### Light Distribution Curve

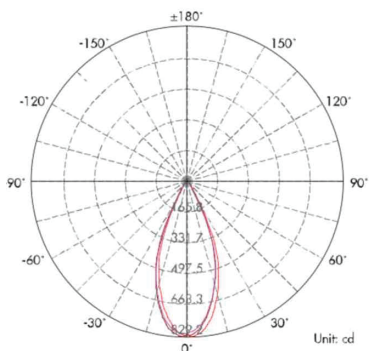

### Dimensions

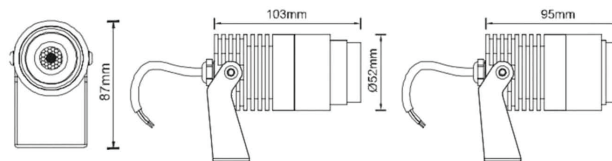

### Lux Distribution Curve

Height	Center L	Beam Angle: 42°	Average B	Diameter
3.281ft	75.919fc		50.517c	2.516ft
1.0m	817.20fc		543.770lx	0.767m
6.562ft	18.980fc		12.629fc	5.031ft
2.0m	204.30lx		135.943lx	1.534m
9.843ft	8.435fc		5.613fc	7.547ft
3.0m	90.800lx		60.419lx	2.300m
13.123ft	4.745fc		3.157fc	10.063ft
4.0m	51.075lx		33.986lx	3.067m
16.404ft	3.037fc		2.021fc	12.578ft
5.0m	32.688lx		21.751lx	3.834m