



Tilt.L

Product Category: *Uplights/ Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Tilt.L is equipped with a standard 30° tilt lens, which effectively minimises glare, making it perfect for illuminating and enhancing architectural elements through washing, grazing, and profiling. Designed for versatility, it can be used for interior and exterior applications, and it includes an installation sleeve for easy setup. Additionally, the resin-filled cable entry and gland ensure the ultimate protection against water ingress, making it suitable for various environmental conditions.

Material	<i>Aluminium & Stainless Steel 316</i>	Beam Angle	<i>60° with a 30° tilt</i>
Lumen Output	<i>480Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>6.7W 9.6V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>Ø78mm x 78mm L</i>	Colour Temperature	<i>2700K / 3000K</i>
Cut Out	<i>66mm</i>		

Light Distribution Curve



Dimensions

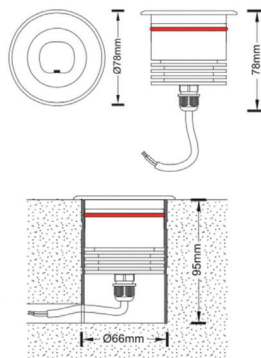

Lux Distribution Curve

