Uno.

Product Category: *Reading Lights*

t: *+(44) 020 7139 5129*   **e:** *enquiries@lightingoflondon.co*   **w:** *www.lightingoflondon.co*

The Uno is a discreet yet efficient recessed reading light that is designed to cater to your lighting requirements.
The Uno light offers 30° of evenly distributed light, which beautifully highlights any bedhead position and its surroundings.
The Uno light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.
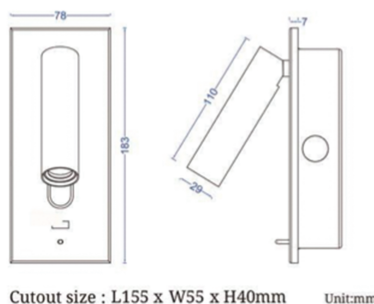
Material	*Aluminium*	**Beam Angle**	*30°*
Lumen Output	*120Lm*	**Luminous Efficacy**	*80lm / W*
Power	*1.5W 3V 700mA*	**IP Rating**	*21*
Dimmable	*N/A*	**Driver Required**	*Non dimmable driver built-in**
CRI	*>95*		
Power Factor	*>0.98*	**Binning**	*2 - 3 SDCM*
Size	*78mm x 183mm*	**DALI Control**	*N/A*
Cut Out	*155mm H x 55mm W x 40mm D*	**Colour Temperature**	*2700K*

Light Distribution Curve

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

UNIT:cd
— C0/180,22.2°
— C30/210,22.6°
— C60/240,23.2°
— C90/270,23.3°

AVERAGE BEAM ANGLE (50%) : 22.8 DEG

Dimensions

Cutout size : L155 x W55 x H40mm   Unit:mm

Lux Distribution Curve

Flux out:59.16 lm

Height	Eavg,Emax	Angle:20.66deg	Diameter
3.281ft / 1m	46.30,71.95fc / 498.4,774.41x		1.196ft / 36.45cm
6.562ft / 2m	11.57,17.99fc / 124.6,193.61x		2.392ft / 72.90cm
9.843ft / 3m	5.144,7.994fc / 55.37,86.051x		3.588ft / 109.35cm
13.12ft / 4m	2.894,4.497fc / 31.15,48.401x		4.784ft / 145.80cm
16.4ft / 5m	1.852,2.878fc / 19.93,30.981x		5.979ft / 182.25cm