



## Follow.Me.P

Product Category: *Spotlights / Downlights*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The plaster-in FollowMe.P spotlight allows the user almost complete directional control. The adjustable cylindrical fitting can point in a 355° horizontal range, or, if a 90° vertical spotlight is desired, it can recess back into its fitting to sit flush against the ceiling.

With three beam angle options of a sharp 15°, a generous 24° or a wider 36°, one has ample options on how to highlight any wall or object.

Product Categories: *Spotlights / Downlights*

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>15° / 24° / 36°</i>
<b>Lumen Output</b>	<i>600Lm</i>	<b>Luminous Efficacy</b>	<i>75lm / W</i>
<b>Power</b>	<i>8W 36V 180mA</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Driver Required</b>	<i>TRIAC dimmable driver supplied</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>DALI Control</b>	<i>Yes (third party driver required)</i>
<b>Size</b>	<i>30mm x 65mm L</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>
<b>Cut Out</b>	<i>55mm</i>	<b>Fire Rating</b>	<i>60 min</i>

### Dimensions

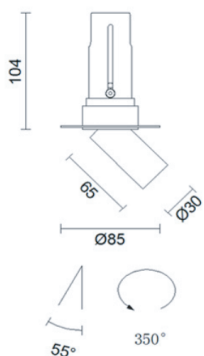

### Lux Distribution Curve

