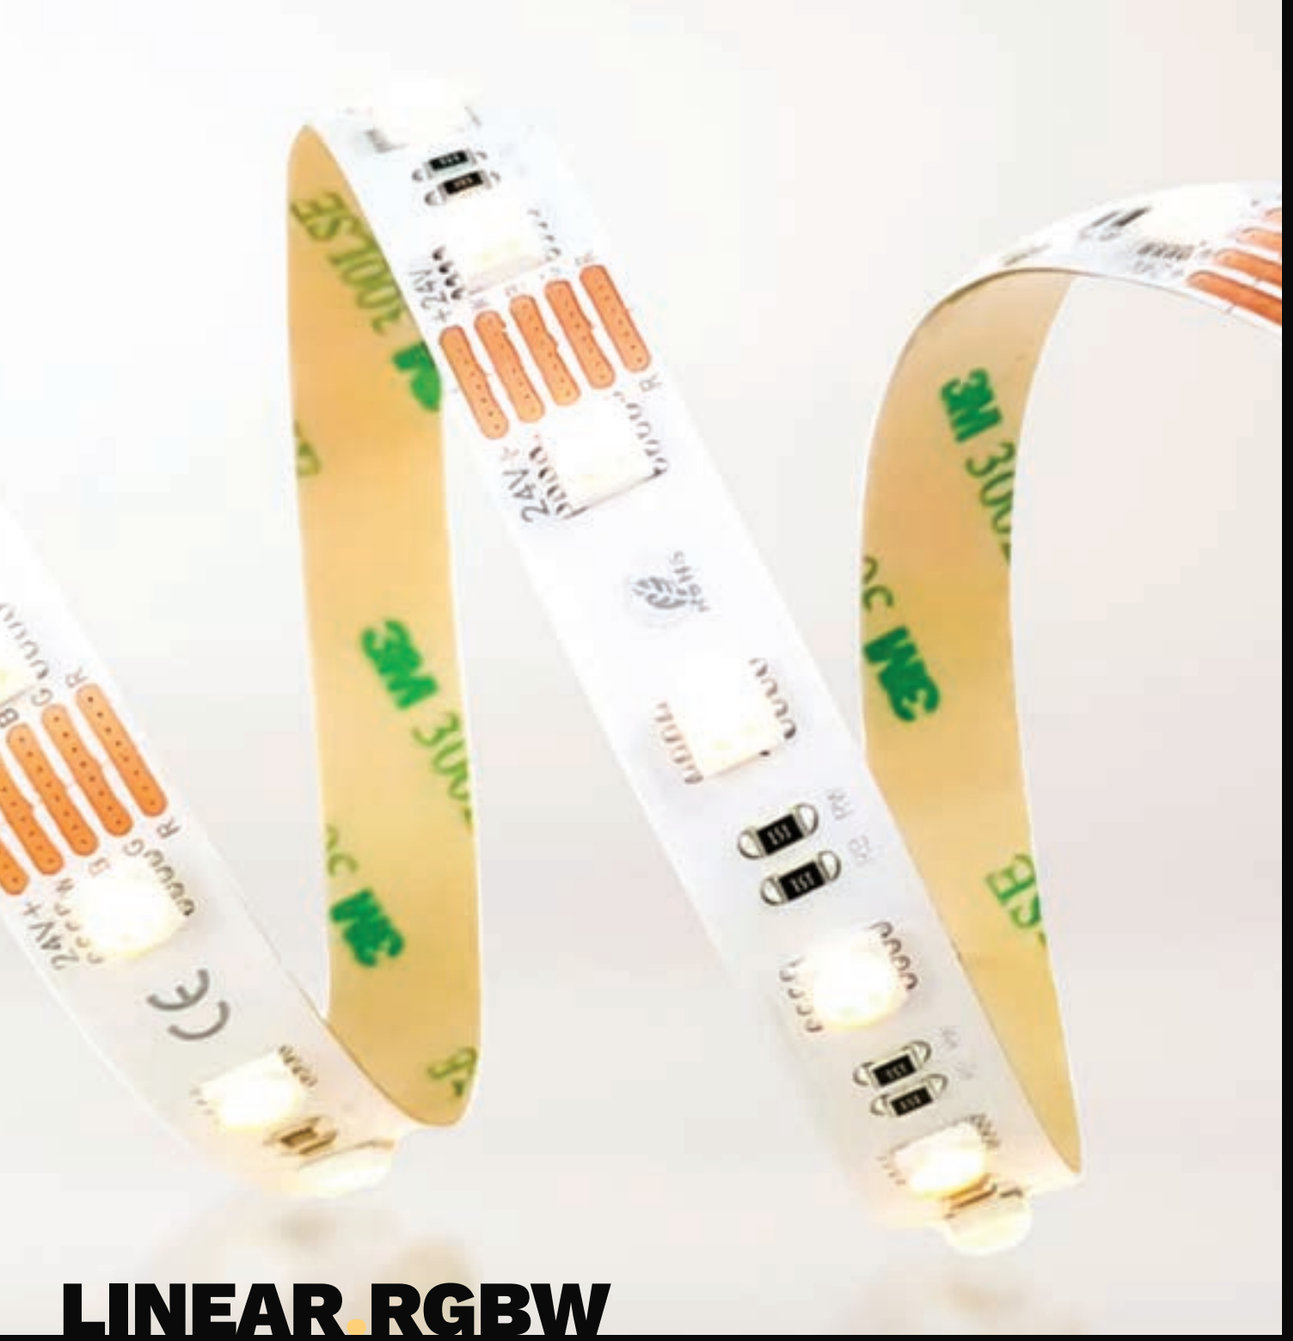

LINEAR.RGBW

SPOTTING GUIDE

	LINEAR.240	LINEAR.350	LINEAR.RGBW
COVE	No Spotting	No Spotting	Spotting Visible
FLUSH	Spotting Visible	No Spotting	Spotting Visible
PLASTER	No Spotting	No Spotting	Spotting Visible
LEAN	No Spotting	No Spotting	Spotting Visible
LINE	No Spotting	No Spotting	Spotting Visible

Input Voltage	DC24v Constant Voltage	**PCB Width**	10mm
Power Per Meter	19.2w / 4.8w per channel	**Beam Angle**	120°
Lumen Watts	57lm/W	**IP Rating**	20 / 66 Nano
Lumen Per Meter	1100lm (4 Chips)	**Colour Temperature**	2700K / 4000K
CRI	>90	**Version**	60 LED's per/m
Cut Length	100mm		