




MARK.

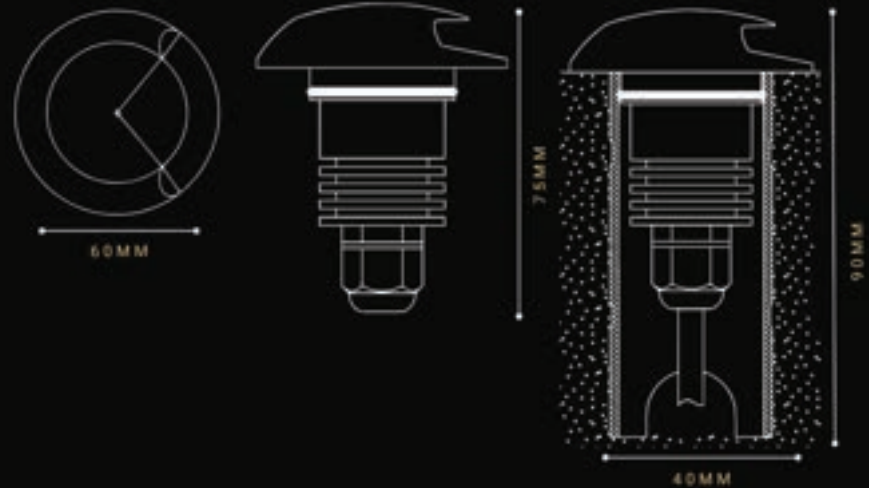

Material	Aluminium & Stainless Steel	Beam Angle	100°
Lumen Output	160Lm	Luminous Efficacy	76lm / W
Power	2.1W 3V 700mA	IP Rating	67
Dimmable	Yes	Fire Rating	N/A
CRI	>95	Driver Required	Yes
Power Factor	>0.98	Binning	2 - 3 SDCM
Size	60mm x 75mm	DALI Control	Yes
Cut Out	40mm	Colour Temperature	2700K