LIGHTING OF LONDON


Powerbank100 - 180.DALI

CONSTANT CURRENT DRIVERS







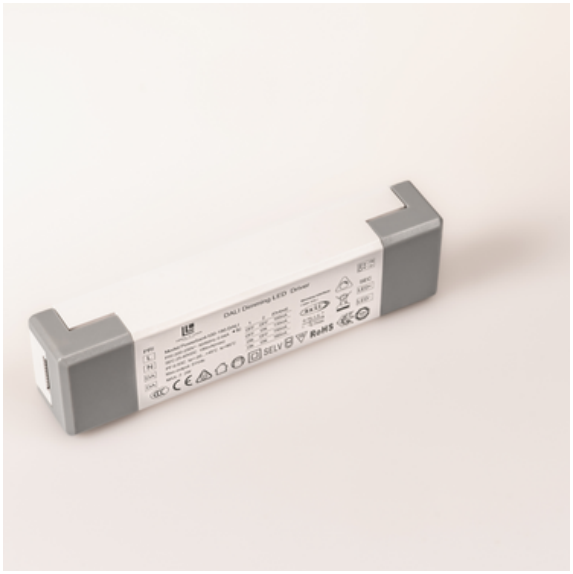

OUTPUT VOLTAGE	24 - 40Vdc
OUTPUT CURRENT	100 / 130 / 150 / 180mA
OUTPUT POWER	2.5W - 7.2W
STROBE LEVEL	No Flicker
DIMMING RANGE	0 - 100%
PWM DIMMING FREQUENCY	>3600Hz
DIMMING INTERFACE	DALI
INPUT VOLTAGE RANGE	200 - 250Vac
FREQUENCY	50 / 60Hz
INPUT CURRENT	<0.07A
EFFICIENCY	80%
IN-RUSH CURRENT	Cold Start 20A
ANTI-SURGE	L-N: 1.5kV
LEAKAGE CURRENT	<0.25mA / 230Vac
WORKING TEMPERATURE	40°C - 80°C
IP	IP20
OVER-CURRENT PROTECTION	Shut Down >102%
SHORT-CIRCUIT PROTECTION	Shut Down Short Circuit

Have a technical question? Get in touch!

office@lightingoflondon.co

@lightingoflondon

02071 139 5129