
Powerbank250.DALI

CONSTANT CURRENT DRIVERS







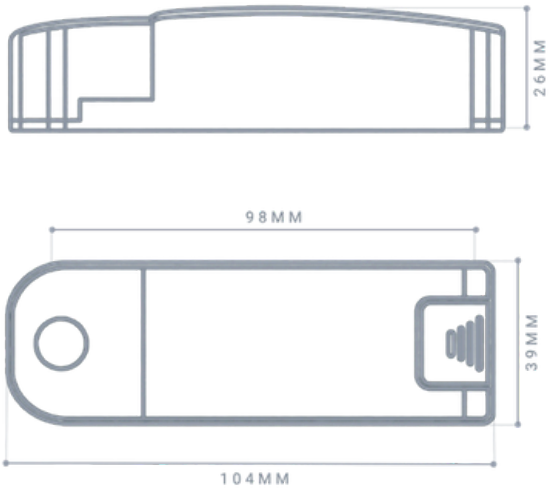

OUTPUT VOLTAGE	9 - 42Vdc
OUTPUT CURRENT	200 / 250 / 300 / 350mA
OUTPUT POWER	1.8W - 14.7W
STROBE LEVEL	0%
DIMMING RANGE	0 - 100%
PWM DIMMING FREQUENCY	N/A
DIMMING INTERFACE	DALI / PUSH DIM
INPUT VOLTAGE RANGE	200 - 250Vac
FREQUENCY	50 / 60Hz
INPUT CURRENT	<0.13A
EFFICIENCY	85%
IN-RUSH CURRENT	Cold Start 1.78A
ANTI-SURGE	L-N: 2kV
LEAKAGE CURRENT	<0.25mA / 230Vac
WORKING TEMPERATURE	45°C - 80°C
IP	IP20
OVER-CURRENT PROTECTION	Shut Down >102%
SHORT-CIRCUIT PROTECTION	Shut Down Short Circuit

Have a technical question? Get in touch!

office@lightingoflondon.co
@lightingoflondon
02071 139 5129