
LIGHTING OF LONDON

Powerbank350 - 700.

CONSTANT CURRENT DRIVERS





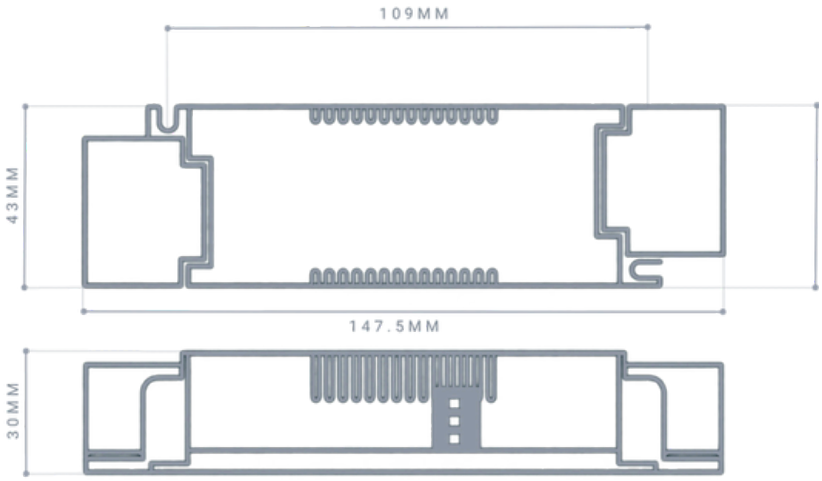



OUTPUT VOLTAGE	9 - 42Vdc
OUTPUT CURRENT	350 / 400 / 450 / 500 / 550 / 600 / 650 / 700 mA
OUTPUT POWER	3.15W - 29.4W
STROBE LEVEL	No Flicker
DIMMING RANGE	0 - 100%
PWM DIMMING FREQUENCY	>3600Hz
DIMMING INTERFACE	DALI
INPUT VOLTAGE RANGE	200 - 250Vac
FREQUENCY	50 / 60Hz
INPUT CURRENT	<0.35A
EFFICIENCY	86%
IN-RUSH CURRENT	Cold Start 30A
ANTI-SURGE	L-N: 1.5kV
LEAKAGE CURRENT	<0.25mA
WORKING TEMPERATURE	45°C - 80°C
IP	IP20
OVER-CURRENT PROTECTION	Shut Down >102%
SHORT-CIRCUIT PROTECTION	Shut Down Short Circuit

Have a technical question? Get in touch!

office@lightingoflondon.co

@lightingoflondon

02071 139 5129