
LIGHTING OF LONDON

Powerbank700.L

CONSTANT CURRENT DRIVERS





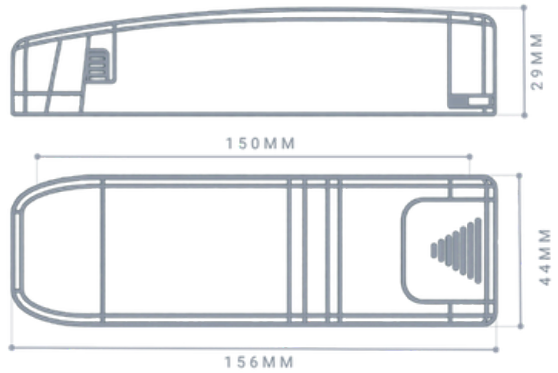



OUTPUT VOLTAGE	25 - 42Vdc
OUTPUT CURRENT	700mA
OUTPUT POWER	17.5W - 29.2W
STROBE LEVEL	8%
DIMMING RANGE	2 - 100%
PWM DIMMING FREQUENCY	N/A
DIMMING INTERFACE	TRIAC / Trailing Leading Edge
INPUT VOLTAGE RANGE	200 - 250Vac
FREQUENCY	50 / 60Hz
INPUT CURRENT	<0.10.2A
EFFICIENCY	85%
IN-RUSH CURRENT	Cold Start 3.0A
ANTI-SURGE	L-N: 1.5kV
LEAKAGE CURRENT	<0.25mA / 230Vac
WORKING TEMPERATURE	45°C - 85°C
IP	IP20
OVER-CURRENT PROTECTION	Shut Down >102%
SHORT-CIRCUIT PROTECTION	Shut Down Short Circuit

Have a technical question? Get in touch!

office@lightingoflondon.co

@lightingoflondon

02071 139 5129